


SPECIFICATIONS

CR 1/2-CH

INSTALLATION:

- Stainless steel conveyor belt travels left-to-right, but may be ordered for right-to-left travel.
- Single and stacked ovens furnished with 2 1/2" (6.4cm) adjustable legs.
- Stacked ovens require a stacking spacer (extra charge).
- Stacked ovens must be installed at least 6" (15.3cm) away from any vertical, combustible surface.
- Ovens should be located so that the ambient air intake never exceeds 100°F (38°C) and does not contain grease or steam.

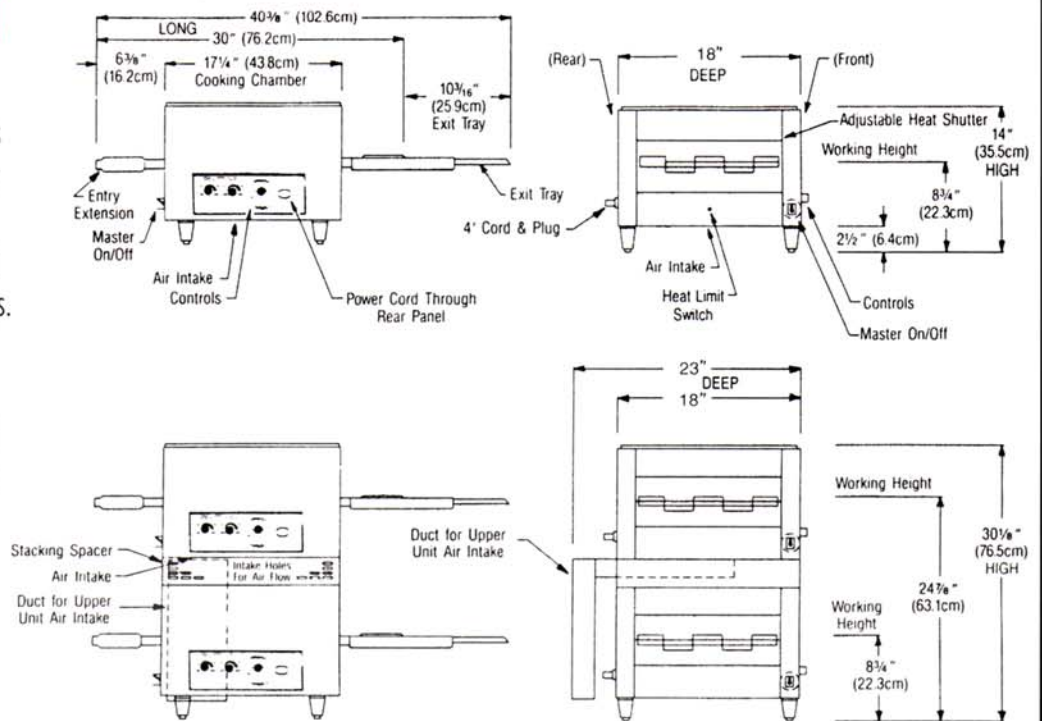

ELECTRICAL

CR-1/2-CH Oven: 3702 watts

MODEL #	VOLTAGE AND PHASE	TOTAL LOAD (AMPS)
CR-1/2-CH	208-1-50	17.8
Conveyor	220-1-50/60	17.0
Oven	240-1-50/60	15.0

**Please Specify Electrical Requirements When Ordering

Supplied with a 4-foot cord and plug, Type 6-20P

WARRANTY

One Full Year on all parts from date of purchase.

Oven: 50 lbs. each Carton: 16"H X 21"W X 33 1/2"L
 Stacking Spacer: 24 lbs. Carton: 20 1/2"H X 16"W X 19 1/2"L
 *May be shipped via UPS within Continental U.S.A.

Model
CR 1/2-CH
Conveyor Oven

