

# SPECIFICATIONS

## Dimensions

### HSM-4

#### (Oven Only)

##### Exterior:

31-1/2" Width

32-1/2" Depth


31-1/2" Height

##### Interior:

18-1/2" Width

28" Depth

17-3/4" Height



COUNTER MODEL  
HSM-4

### HSM-4/P-8S

#### (Oven-Proofer)

##### Overall Exterior:

31-1/2" Width

32-1/2" Depth


71-1/2" Height (On 4" casters)

##### Proofer Interior:

19" Width

29" Depth

27" Height

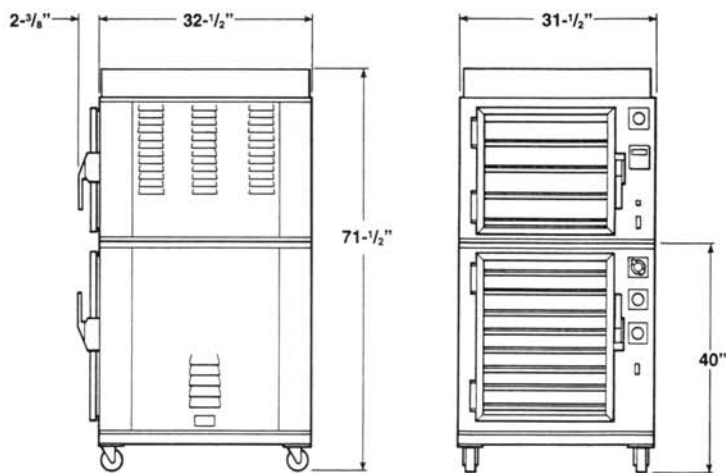

SIDE

FRONT

# ELECTRICAL

**HSM-4 (Oven Only): 7520 watts • 8 kw • 50/60 Hz**

**HSM-4/P-8S (Oven Proofer Combination): 9000 watts • 9 kw • 50/60 Hz**

MODEL#	VOLTAGE AND PHASE	NEUTRAL	TOTAL LOAD (AMPS)
<b>HSM-4</b> (Oven Only)	120/208-1-50/60	REQUIRED	36.0
	120/208-3-50/60	REQUIRED	30.0
	120/240-1-50/60	REQUIRED	31.0
	120/240-3-50/60	REQUIRED	26.0
<b>HSM-4/P-8S</b> (Combination)	120/208-1-50/60	REQUIRED	44.0
	120/208-3-50/60	REQUIRED	38.0
	120/240-1-50/60	REQUIRED	38.0
	120/240-3-50/60	REQUIRED	33.0

\*\* Please Specify Electrical Requirements When Ordering

Proofer Only: 120V, 1ph., 50/60 Hz, 15 Amps

# WARRANTY

One Full Year on all parts from date of purchase.

For general sales and engineering information only.

All units are subject to change without notice.

Please consult factory for certified specifications.

Approximately 350 lbs. Oven Only  
500 lbs. Oven/Proofer  
130 lbs. CR-Base

**"Even Flow"**  
**Full Size Convection Oven**  
(Oven/Proofer Combination)

**DELUXE**  
EQUIPMENT COMPANY, INC.