


# SPECIFICATIONS

## Dimensions

### HSM-6 (Oven Only)

Exterior:  
31-1/2" Width  
34" Depth  
39" Height

Interior:  
19" Width  
28" Depth  
28" Height

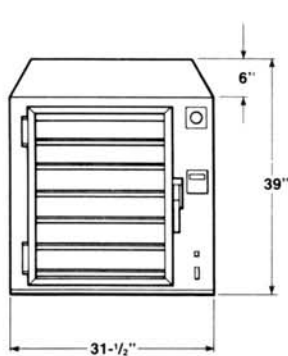

COUNTER MODEL  
HSM-6


### HSM-6 / P-8S (Oven-Proofer)

Overall Exterior:  
31-1/2" Width  
34" Depth  
79" Height (On 4" casters)


Proofer Interior:  
19" Width  
29" Depth  
27" Height

### HSM-6/CRB (Oven-Cooling Rack)

Overall Exterior:  
31-1/2" Width  
34" Depth  
77" Height (On 4" casters)

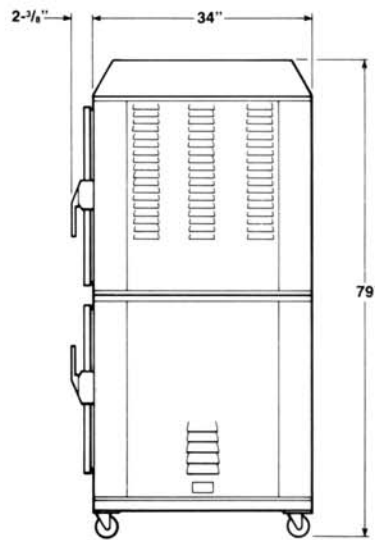

MODEL HSM 6/P-8S

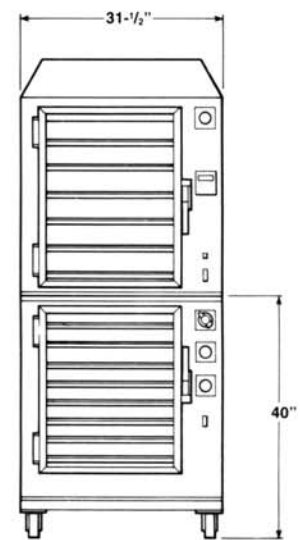

# ELECTRICAL

**HSM-6 (Oven Only): 8200 watts • 9 kw • 50/60 Hz**

**P-8S (Proofer): 1550 watts • 50/60 Hz**

MODEL#	VOLTAGE AND PHASE	NEUTRAL	TOTAL LOAD (AMPS)
HSM-6 Oven	120/208-1-50/60	REQUIRED	39.5
	120/208-3-50/60	REQUIRED	27.0
	120/240-1-50/60	REQUIRED	34.0
	120/240-3-50/60	REQUIRED	23.0
P-8S Proofer	120/1-50/60	REQUIRED	15.0

\*\* Please Specify Electrical Requirements When Ordering

# WARRANTY

One Full Year on all parts from date of purchase.

For general sales and engineering information only.  
All units are subject to change without notice.  
Please consult factory for certified specifications.

**"Even Flow"**  
**Full Size Convection Oven**  
(Oven/Proofer Combination)

Shipping WT.: Approximately 400 lbs. Oven Only  
500 lbs. Oven/Proofer  
130 lbs. CR-Base

**DELUXE**  
EQUIPMENT COMPANY, INC.